




| | |
|----------------------|---------------------------|
| Description | MINIATURE CIRCUIT BREAKER |
| Code | MT 60 |
| No. of poles | 3P |
| No. modules | 3 |
| Rated current | 63 A |
| Curve | C |
| Rated voltage | 230.0 - 400.0 V |

| | | | |
|--|------------------------|--|------------------------|
| Standard | EN 60898, EN 60947-2 | Rated frequency (Hz) | 50/60 Hz |
| Breaking capacity EN 60898 230V (Icn) | 6.000 A | Breaking capacity EN 60898 400V (Icn) | 6.000 A |
| Breaking capacity EN 61009 (Ics) | 1 x Icn | Breaking capacity EN 60947-2 230V (Icu) | 20 kA |
| Breaking capacity EN 60947-2 400V (Icu) | 10 kA | Breaking capacity EN 60947-2 (Ics) | 75% Icu |
| Insulation voltage | 500 V | Rated impulse withstand voltage | 4 kV |
| Minimum operating voltage | 12V ac/dc | Maximum operating voltage | 440V AC / 220V DC |
| Electrical endurance | 10.000 | Mechanical endurance | 20.000 |
| Section rigid cable | Max 35 mm ² | Section flexible cable | Max 35 mm ² |
| Rated tightening torque | 2 Nm | Operating temperature | -25 +60 °C |
| Stocking temperature | -40 +70 °C | Electrocod | 1411 |

DIMENSIONAL

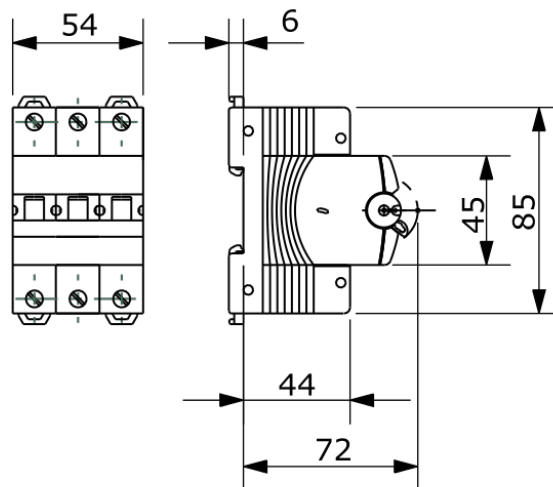

STANDARDS/APPROVALS

