

TECHNICAL SPECIFICATION

LED Spotlight fixtures - SA-914



Technical data

- Model : 3x1W
- Color temperature : 2700K/4000K
- Rated voltage : 230V/50Hz
- Power Supply : Low Voltage , DC device
- LED type : High power
- Light source: Epistar Taiwan
- Protection against dust and moisture : IP20
- Color: satin nickel / gold / black
- Long life : 30 000 hours
- Colour rendering index: Ra≥80
- Beam angle: 60°
- Installation: recessed mounting


Areas of application

- Commercial buildings
- Administrative buildings
- Residential buildings
- Hospitals, Schools, Banks
- Entertainment and leisure spots

Product benefits


- Energy-saving fixture in replacement of fluorescent downlights
- Safety, low voltage operation
- Installation in suspended ceilings
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission
- Compact size

Variants and dimensions



| Watt | LED chip lumens (lm) | Whole fixture lumens (lm) | Colour temp. (K) | Colour body | Size | | | Catalogue number | Packing (pcs) |
|------|----------------------|---------------------------|------------------|--------------|------|----|----|------------------|---------------|
| | | | | | D | H | D1 | | |
| 3W | 110 | 240 | 4000-4300 | satin nickel | 92 | 45 | 85 | 92914WH/SN | 100 |
| 3W | 110 | 240 | 2700-3000 | satin nickel | 92 | 45 | 85 | 92914WW/SN | 100 |
| 3W | 110 | 240 | 4000-4300 | gold | 92 | 45 | 85 | 92914WH/G | 100 |
| 3W | 110 | 240 | 2700-3000 | gold | 92 | 45 | 85 | 92914WW/G | 100 |
| 3W | 110 | 240 | 4000-4300 | graphite | 92 | 45 | 85 | 92914WH/GR | 100 |
| 3W | 110 | 240 | 2700-3000 | graphite | 92 | 45 | 85 | 92914WW/GR | 100 |

Energy efficiency

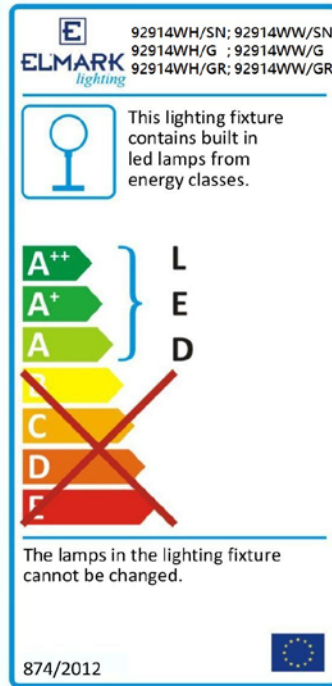

Barcodes

| Barcode | Catalogue number |
|---------------|------------------|
| 3800131174208 | 92914WH/SN |
| 3800131174215 | 92914WW/SN |
| 3800131174222 | 92914WH/G |
| 3800131174239 | 92914WW/G |
| 3800131174246 | 92914WH/GR |
| 3800131174253 | 92914WW/GR |

Standards

EN 55015

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 60598-1; EN 60598-2-2

